

SIGELEI-50W

SIGELEI-50W is an advanced device with high wattage. It is a turning point, a new development direction of vapor smart electronic cigarette. Please read the user manual carefully before using.

Technical Parameter

- ▶ Variable Wattage :7.0 w – 50.0 w
- ▶ Output Voltage Range : 3.0 v – 8.5 v
- ▶ Atomizer Range: 0.2Ω – 3.0Ω
- ▶ Battery Voltage Range: 3.2 v – 4.2 v
- ▶ Battery:18650

WARNING : You will get burned if you keep the ecig with long-time high wattage. Please lower the wattage.

01

SIGELEI-50W

Main Feature

- ★ Visual Operating System
- ★ Adjustable Variable Wattage
- ★ Low Voltage Protection
- ★ Low Resistance Protection
- ★ Input High Voltage Warning
- ★ Output Short-Circuit Protection
- ★ Reverse Battery Protection
- ★ Over Temperature Protection
- ★ USB Direct Charge
- ★ Replaceable Battery

ERROR-CODE:

Low Res=low atomizer resistance(< 0.2Ω)

Low-Bat=low battery voltage(< 3.2V)

HHHHHHHH=High input voltage(> 5V)

TOO HOT= Excessive Hot for Internal PCB

Operation Instruction


BATTERY INSTALLMENT:

Install battery properly as follows: Turn the rear cover to 90° .(Showed

02

SIGELEI-50W

in the picture) Put the battery into the battery case, complying to positive and negative pole rule. Then restore the back panel.

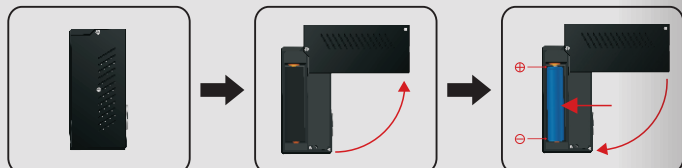

PIN ADJUSTMENT DIAGRAM

Tip for the adjustment for the pin: adjustable 510 pin with the reversed thread.

03

SIGELEI-50W



Lower the pin by anticlockwise
(see the arrow direction below)



Heighten the pin by clockwise
(see the arrow direction below)

SYSTEM ON:

Press the power button 5 times continuously to turn on the device. Standby mode is expected after “SIGELEI” showed on the screen. On the standby mode, the atomizer resistance, output wattage and battery voltage will be displayed on the screen.



04

SIGELEI-50W

LOCK/UNLOCK:

Press “+” and “-” simultaneously, the system will be locked as “lock” showed on the screen. (You can not vape when device is locked.) “Please unlock” will be showed on the screen if any button being pressed. Press “+” and “-” simultaneously to unlock.



WATT ADJUSTMENT:

Output watt can be adjusted from 7.0w to 50.0w.

Watt increases by 0.1 increment by pressing “+”

Watt decreases by 0.1 decrement by pressing “-”

SYSTEM OFF:

Press power button 5 times continuously, then system off.



05

SIGELEI-50W

CHARGING :

Either internal USB charging or external battery charging. the indicate light shows red in USB charging condition and turns green when the device is fully charged. Input parameter via USB charging: 5.0V –800mA. please do not reverse the battery, otherwise charging function will be voided.



TIPS :

Please read the instruction before using SIGELEI-50W.

1. SIGELEI-50W is not suitable for children under 18, pregnant woman, nursing mother, the disabled or person at the risk of heart attack, hypertension, diabetes, or those taking medicine for depression and asthma.
2. This unit may include small parts. Please keep it out of reach of children and pets.
3. Please do not place it in excessively hot, cold or humid environment.
4. Install battery before using, or the device will not work.
5. Please do not drop, throw or abuse the device.

06

SIGELEI-50W

6. This product is sold purely for recreational purpose — it is not a smoking cessation product.
7. You are supposed to adjust wattage to 15w if you'd like to use liquid atomizer.

6 MONTHS WARRANTY :

Improper operation will void the warranty.

INQUIRY AND AFTER-SALES SERVICE BASED IN USA:

Address: 1996 CALLE BOGOTA ROWLANG HEIGHTS CA 91748 USA

Contact: SIGELEI Service Group

EMAIL: Sigeleiconny@gmail.com




ALL RIGHTS RESERVED BY SIGELEI.

www.sigelei.com

07

SIGELEI-50W

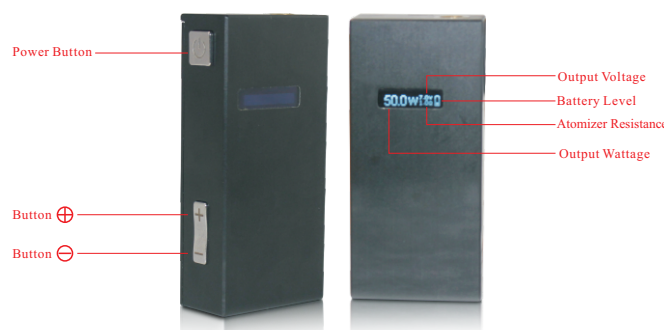

08